

Rack-N-Bag Configuration Form

Name:

Phone:

Email:

Build Time – Please allow 10 days for configuration

1. Bottom Tier - Mixer / Recorder:

Enter the Make & Model of Mixer / Recorder:

2. Center Tier - Power Distro (Only Applies if Purchasing Distro Kit)

Choose Power Distro Connector End Types & Length:

Select ONE (1) Hirose to Hirose - See Page 2

Select FOUR (4) Hirose to DC Cables - See Page 2

3. Top Tier & Tilt-Up Section - Wireless Devices:

Select ONE of the Following Configuration Options:

Standard


Extended Default

Extended Custom - Provide Equipment Make & Models :

Standard (28 mm height – 1 1/8" approximate) Single Row of Wireless Devices Secured to the Tilt-Up Section. Measures 28 mm between Top Tier & Tilt-Up Section.

Extended Default (60 mm height – 2 3/8" approximate) Double Row of Wireless Devices; One Row on Tilt-Up Section and One Row on Top Tier. Choose this option if you do not know equipment type.

Extended Custom (Between 50 – 60 mm) Double Row of Wireless Devices; One Row on Tilt-Up Section and One Row on Top Tier. Choose this option if you can provide equipment make & models. Film Devices will configure based on manufacturer specifications. Height will be between 50 – 60 mm.

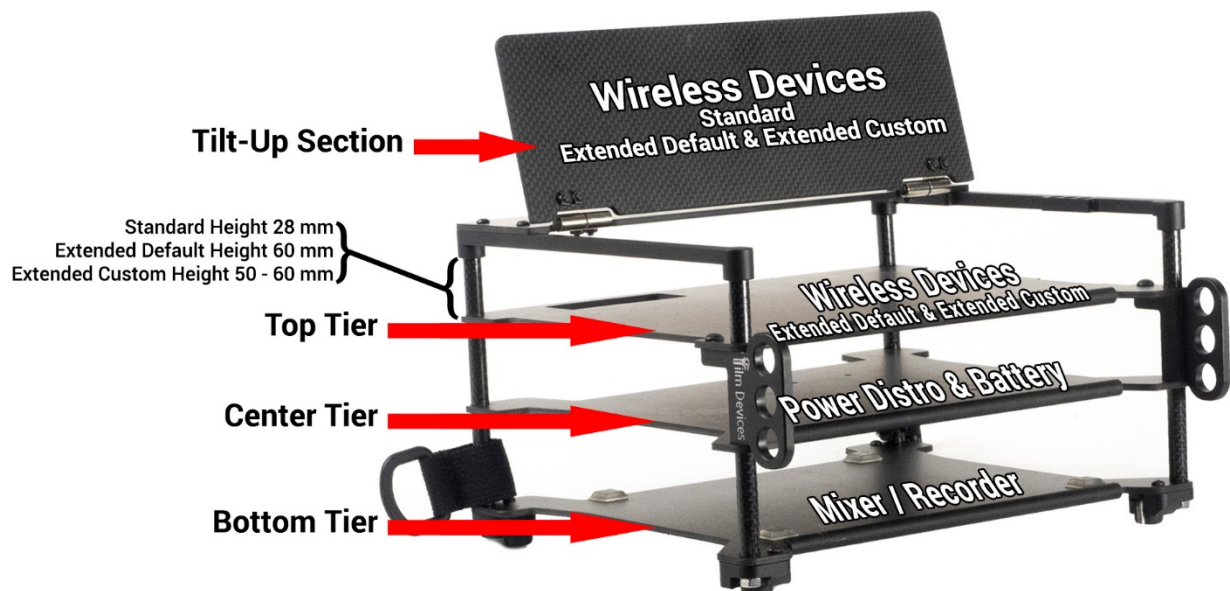

Selection 2: *Power Cable Options when Power Distro is Purchased - 1 Hirose to Hirose & 4 Hirose to DC*

SELECT ONE Hirose to Hirose:	Length	Stock #	Select 1
Hirose Straight to Hirose Straight Power Cable	30cm	CBL-HSHS30	
Hirose Straight to Hirose Straight Power Cable	40cm	CBL-HSHS40	
Hirose Straight to Hirose Straight Power Cable	50cm	CBL-HSHS50	
Hirose Straight to Hirose 90° Degree Power Cable	30cm	CBL-HSHN30	
Hirose Straight to Hirose 90° Degree Power Cable	40cm	CBL-HSHN40	
Hirose Straight to Hirose 90° Degree Power Cable	50cm	CBL-HSHN50	
SELECT FOUR Hirose to DC:	Length	Stock #	Select 4
DC Connector End 2.1 x 5.5 mm for Electrosonics			QTY
Hirose Straight to DC 2.1 x 5.5 mm Straight Power Cable	30cm	CBL-HSDCS30-2.1	
Hirose Straight to DC 2.1 x 5.5 mm Straight Power Cable	40cm	CBL-HSDCS40-2.1	
Hirose Straight to DC 2.1 x 5.5 mm Straight Power Cable	50cm	CBL-HSDCS50-2.1	
Hirose Straight to DC 2.1 x 5.5 mm 90° Power Cable	30cm	CBL-HSDCN30-2.1	
Hirose Straight to DC 2.1 x 5.5 mm 90° Power Cable	40cm	CBL-HSDCN40-2.1	
Hirose Straight to DC 2.1 x 5.5 mm 90° Power Cable	50cm	CBL-HSDCN50-2.1	
Hirose Straight to DC 2.1 x 5.5 mm Straight Locking Power Cable	30cm	CBL-HSDCSL30-2.1	
Hirose Straight to DC 2.1 x 5.5 mm Straight Locking Power Cable	40cm	CBL-HSDCSL40-2.1	
Hirose Straight to DC 2.1 x 5.5 mm Straight Locking Power Cable	50cm	CBL-HSDCSL50-2.1	
Hirose Straight to DC 2.1 x 5.5 mm 90° Locking Power Cable	30cm	CBL-HSDCNL30-2.1	
Hirose Straight to DC 2.1 x 5.5 mm 90° Locking Power Cable	40cm	CBL-HSDCNL40-2.1	
Hirose Straight to DC 2.1 x 5.5 mm 90° Locking Power Cable	50cm	CBL-HSDCNL50-2.1	
DC Connector End 2.1 x 5.5 mm for Zaxcom			QTY
Hirose Straight to DC 2.5 x 5.5 mm Straight Power Cable	30cm	CBL-HSDCS30-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Power Cable	40cm	CBL-HSDCS40-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Power Cable	50cm	CBL-HSDCS50-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Locking Power Cable	30cm	CBL-HSDCSL30-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Locking Power Cable	40cm	CBL-HSDCSL40-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Locking Power Cable	50cm	CBL-HSDCSL50-2.5	

Return Completed Form To Sales@FilmDevices.com - Please Put "RNB Configuration" in the subject line. You can also call us to place your custom Rack-N-Bag order at 707.935.3363