Rack-N-Bag Small Configuration Form – Allow 10 Days for Build Time

Name:

Phone:

Email:

List Equipment Below:

Single (Mixer / Recorder) Enter Model:

Stacked (Mixer / Recorder with Expansion Unit or Receiver Bay) Enter Models:
NOTE: Top Tier Height can only be 12mm High if using Stacked. Tilt-Up Section still Included.

Additional Equipment (Receivers, HOPS, Antenna Distros, etc.) Enter Models:

1a. Top Tier Height Available For Sound Devices MixPre Series:

Select ONE of the Following Configuration Options:

Standard (36 mm height -1.4" approximate) Single Row of Wireless Devices Extended (70 mm height -2.75" approximate) Double Row of Wireless Devices Custom - (36 mm - 70 mm) You Configure Enter Height Below in Millimeters

1b. Top Tier Height Available For Zaxcom Nova, Sound Devices 833 & Zoom F4 & F8:


Select ONE of the Following Configuration Options:

Standard (36 mm height – 1.4" approximate) Single Row of Wireless Devices

Extended (52 mm height – 2.04" approximate) Single Row of Wireless Devices

Custom – (36 mm – 52 mm) You Configure

Enter Height Below in Millimeters

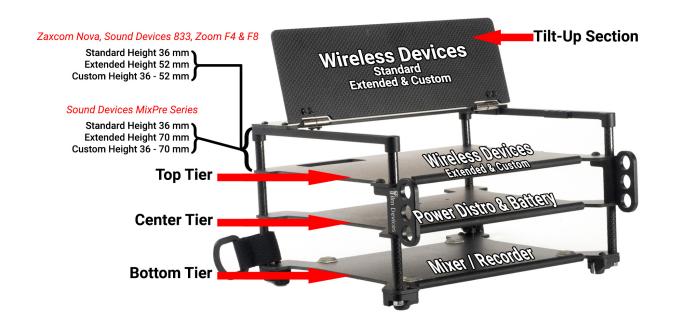

OPTIONAL CONFIGURATION ACCESSARIES - ADD TO CART SEPARATELY!

1. Center Tier - Power Distro

Rack-N-Bag Small Power Distro w/ Sled & 5 Cables (Add to Cart Separately)
Rack-N-Bag Large Power Distro w/ Sled & 5 Cables (Add to Cart Separately)

2. Choose Power Distro Connector End Types & Length

Select ONE (1) Hirose to Hirose & FOUR (4) Hirose to DC Cables Below

SELECT ONE Hirose to Hirose:	Length	Stock #	Select 1
Hirose Straight to Hirose Straight Power Cable	30cm	CBL-HSHS30	
Hirose Straight to Hirose Straight Power Cable	40cm	CBL-HSHS40	
Hirose Straight to Hirose Straight Power Cable	50cm	CBL-HSHS50	
Hirose Straight to Hirose 90° Degree Power Cable	30cm	CBL-HSHN30	
Hirose Straight to Hirose 90° Degree Power Cable	40cm	CBL-HSHN40	
Hirose Straight to Hirose 90° Degree Power Cable	50cm	CBL-HSHN50	
SELECT FOUR Hirose to DC:	Length	Stock #	Select 4
DC Connector End 2.1 x 5.5 mm for Electrosonics			Enter QTY
Hirose Straight to DC 2.1 x 5.5 mm Straight Power Cable	30cm	CBL-HSDCS30	
Hirose Straight to DC 2.1 x 5.5 mm Straight Power Cable	40cm	CBL-HSDCS40	
Hirose Straight to DC 2.1 x 5.5 mm Straight Power Cable	50cm	CBL-HSDCS50	
Hirose Straight to DC 2.1 x 5.5 mm 90° Power Cable	30cm	CBL-HSDCN30	
Hirose Straight to DC 2.1 x 5.5 mm 90° Power Cable	40cm	CBL-HSDCN40	
Hirose Straight to DC 2.1 x 5.5 mm 90° Power Cable	50cm	CBL-HSDCN50	
Hirose Straight to DC 2.1 x 5.5 mm Straight Locking Power Cable	30cm	CBL-HSDCSL30	
Hirose Straight to DC 2.1 x 5.5 mm Straight Locking Power Cable	40cm	CBL-HSDCSL40	
Hirose Straight to DC 2.1 x 5.5 mm Straight Locking Power Cable	50cm	CBL-HSDCSL50	
Hirose Straight to DC 2.1 x 5.5 mm 90° Locking Power Cable	30cm	CBL-HSDCNL30	
Hirose Straight to DC 2.1 x 5.5 mm 90° Locking Power Cable	40cm	CBL-HSDCNL40	
Hirose Straight to DC 2.1 x 5.5 mm 90° Locking Power Cable	50cm	CBL-HSDCNL50	
DC Connector End 2.5 x 5.5 mm for Zaxcom			
Hirose Straight to DC 2.5 x 5.5 mm Straight Power Cable	30cm	CBL-HSDCS30-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Power Cable	40cm	CBL-HSDCS40-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Power Cable	50cm	CBL-HSDCS50-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Locking Power Cable	30cm	CBL-HSDCSL30-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Locking Power Cable	40cm	CBL-HSDCSL40-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Locking Power Cable	50cm	CBL-HSDCSL50-2.5	

Dual USB Power Outlet (Add to Cart Separately)

Phone Holder (Add to Cart Separately)

Wing Kit (Add to Cart Separately)

Docking Bracket (Add to Cart Separately)

Add Options to Cart Separately & Return Completed Form to Sales@FilmDevices.com - Please Put "RNB Configuration" in the subject line. You can also call us to place your custom Rack-N-Bag order at 707.935.3363