Rack-N-Bag Small Configuration Form - Allow 10 Days for Build Time

Name:

Phone:

Email:

List Equipment Below:

Single (Mixer / Recorder) Enter Model:

Stacked (Mixer / Recorder with Expansion Unit or Receiver Bay) Enter Models:
NOTE: Top Tier Height Can Only be

Additional Equipment (Receivers, HOPS, Antenna Distros, etc.) **Enter Models:**

Standard (40 mm) if using Stacked.

1. Top Tier Height Available For Most Mixer / Recorders:


Select ONE of the Following Configuration Options:

40 mm height – Standard Single Row of Wireless Devices or Stacked

50 mm height – May be Suitable for Double Row of Wireless Devices Depending on Equipment

60 mm height - May be Suitable for Double Row of Wireless Devices Depending on Equipment

70 mm height – For MixPre Only. Suitable for Double Row of Wireless Devices Depending on Equipment

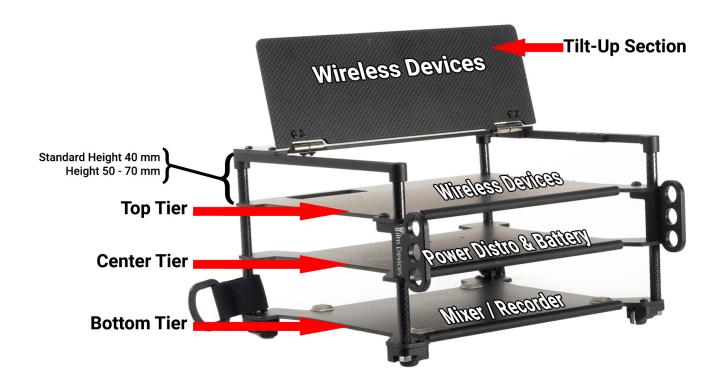

OPTIONAL CONFIGURATION ACCESSORIES - ADD TO CART SEPARATELY!

Dual USB Power Outlet (Add to Cart Separately)

Phone Holder (Add to Cart Separately)

Wing Kit for Medium Rack-N-Bag (Add to Cart Separately)

Docking Bracket (Add to Cart Separately)

1. Center Tier - Power Distro

Rack-N-Bag Small Power Distro w/ Sled & 5 Cables (Add to Cart Separately)
Rack-N-Bag Large Power Distro w/ Sled & 5 Cables (Add to Cart Separately)

2. Choose Power Distro Connector End Types & Length

Select ONE (1) Hirose to Hirose & FOUR (4) Hirose to DC Cables Below

SELECT ONE Hirose to Hirose:	Length	Stock #	Select 1
Hirose Straight to Hirose Straight Power Cable	30cm	CBL-HSHS30	
Hirose Straight to Hirose Straight Power Cable	40cm	CBL-HSHS40	
Hirose Straight to Hirose Straight Power Cable	50cm	CBL-HSHS50	
Hirose Straight to Hirose 90° Degree Power Cable	30cm	CBL-HSHN30	
Hirose Straight to Hirose 90° Degree Power Cable	40cm	CBL-HSHN40	
Hirose Straight to Hirose 90° Degree Power Cable	50cm	CBL-HSHN50	
SELECT FOUR Hirose to DC:	Length	Stock #	Select 4
DC Connector End 2.1 x 5.5 mm for Electrosonics			Enter QTY
Hirose Straight to DC 2.1 x 5.5 mm Straight Power Cable	30cm	CBL-HSDCS30	
Hirose Straight to DC 2.1 x 5.5 mm Straight Power Cable	40cm	CBL-HSDCS40	
Hirose Straight to DC 2.1 x 5.5 mm Straight Power Cable	50cm	CBL-HSDCS50	
Hirose Straight to DC 2.1 x 5.5 mm 90° Power Cable	30cm	CBL-HSDCN30	
Hirose Straight to DC 2.1 x 5.5 mm 90° Power Cable	40cm	CBL-HSDCN40	
Hirose Straight to DC 2.1 x 5.5 mm 90° Power Cable	50cm	CBL-HSDCN50	
Hirose Straight to DC 2.1 x 5.5 mm Straight Locking Power Cable	30cm	CBL-HSDCSL30	
Hirose Straight to DC 2.1 x 5.5 mm Straight Locking Power Cable	40cm	CBL-HSDCSL40	
Hirose Straight to DC 2.1 x 5.5 mm Straight Locking Power Cable	50cm	CBL-HSDCSL50	
Hirose Straight to DC 2.1 x 5.5 mm 90° Locking Power Cable	30cm	CBL-HSDCNL30	
Hirose Straight to DC 2.1 x 5.5 mm 90° Locking Power Cable	40cm	CBL-HSDCNL40	
Hirose Straight to DC 2.1 x 5.5 mm 90° Locking Power Cable	50cm	CBL-HSDCNL50	
DC Connector End 2.5 x 5.5 mm for Zaxcom			
Hirose Straight to DC 2.5 x 5.5 mm Straight Power Cable	30cm	CBL-HSDCS30-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Power Cable	40cm	CBL-HSDCS40-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Power Cable	50cm	CBL-HSDCS50-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Locking Power Cable	30cm	CBL-HSDCSL30-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Locking Power Cable	40cm	CBL-HSDCSL40-2.5	
Hirose Straight to DC 2.5 x 5.5 mm Straight Locking Power Cable	50cm	CBL-HSDCSL50-2.5	

Add Options to Cart Separately & Return Completed Form to Sales@FilmDevices.com - Please Put "RNB Configuration" in the subject line. You can also call us to place your custom Rack-N-Bag order at 707.935.3363